

High Flow $C_v = 3.3, 6.0$ or 12.0
maximum 6000 PSIG in/maximum 6000 PSIG out
externally gas loaded/non-venting/pressure reducing

26-1200 Series

Specifications

□ Operating Parameters

pressure rating per criteria of ANSI/ASME B31.3
maximum rated inlet pressure . . . 4000 & 6000 PSIG
outlet pressure to maximum inlet
design proof pressure 150% maximum
rated operating
leakage bubble-tight
flow capacity $C_v = 3.3, 6.0$ or 12.0^*

** A secondary pressure drop due to the outlet cross-hole can significantly affect the rated flow capacity. Contact the Tescom for flow curve data when outlet pressure is less than 1000 PSIG.*


□ Media Contact Materials

body 303, 316 Stainless Steel or
2024-T351 Aluminum
seat CTFE or Vespel®
diaphragm Buna-N or Viton®
o-rings Buna-N or Viton®
back-up rings Teflon®
remaining parts 300 Series Stainless Steel
See the following Specifications for more details.


□ Cleaning CGA 4.1 and ASTM G93

Pressure Conversion 14.5 PSIG = 1 bar 145 PSIG = 1 MPa

Teflon®, Vespel® and Viton® are registered trademarks of Du Pont.



Typical Application

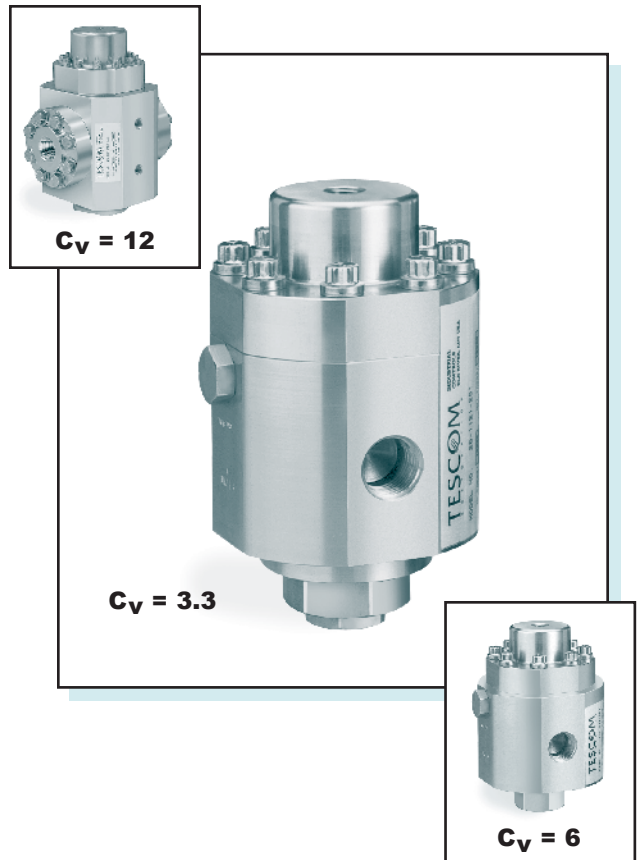


Advantages

- Diaphragm sensed, highly sensitive
- Modular construction, easy service
- External sensing available for improved accuracy
- Balanced main valve increases seat life
- Mounts in any position
- Low droop and lock-up

TESCOM


EMERSON
Process Management

26-1200 Series $C_v = 3.3$

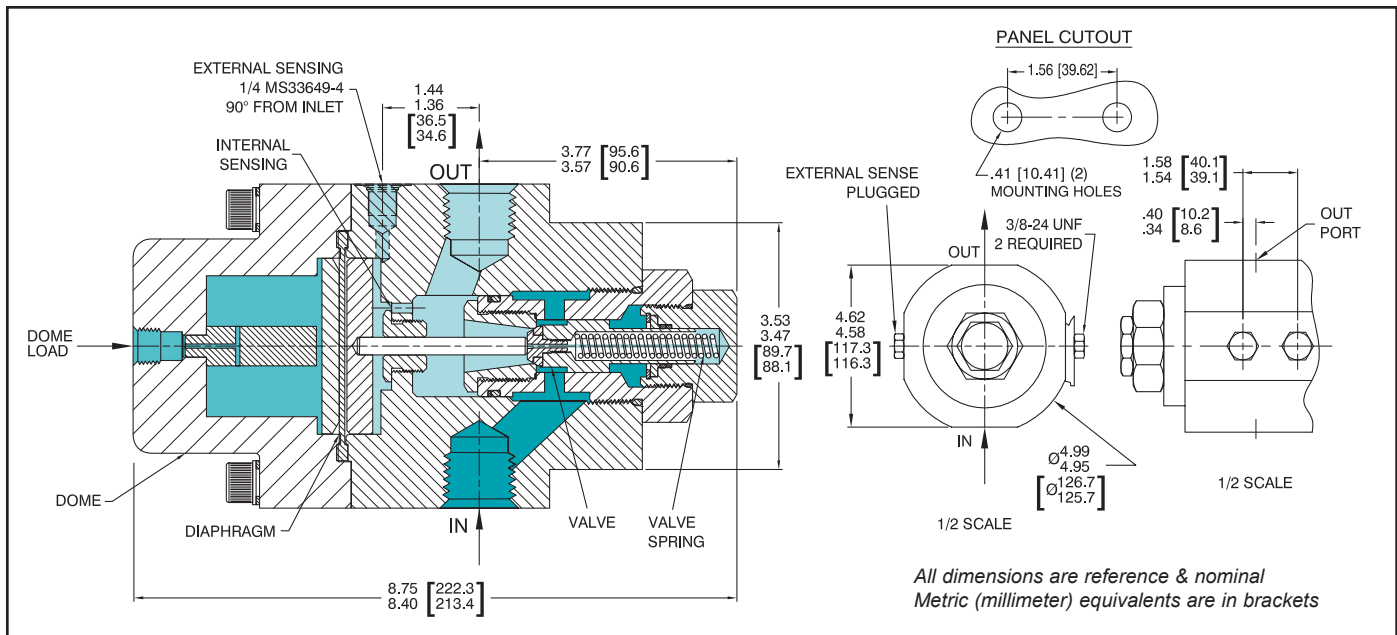

Specifications: $C_v = 3.3$

Operating Parameters

maximum rated inlet pressure:

stainless steel body 6000 PSIG

aluminum body 4000 PSIG

operating temperature* -40° F to +165° F
(-40° C to +75° C)

flow capacity $C_v = 3.3$

*For extended temperature applications, consult Tescom.

Media Contact Materials

body 303, 316 Stainless Steel or
2024-T351 Aluminum

seat CTFE or Vespel®

diaphragm Buna-N

o-rings Buna-N

back-up rings Teflon®

gasket CTFE

retaining ring 15-7 Stainless Steel

valve cap 17-4 Stainless Steel

remaining parts 300 Series Stainless Steel

For other materials and modifications, please consult Tescom.

Weight


Stainless Steel 25 lbs. (11.32 kg)

Aluminum 10 lbs. (4.5 kg)

Pressure Conversion 14.5 PSIG = 1 bar 145 PSIG = 1 MPa

Flow Chart

MODEL NO. 26-1221-3161
1/2" DIAMETER ORIFICE
E.I. NO. 0244

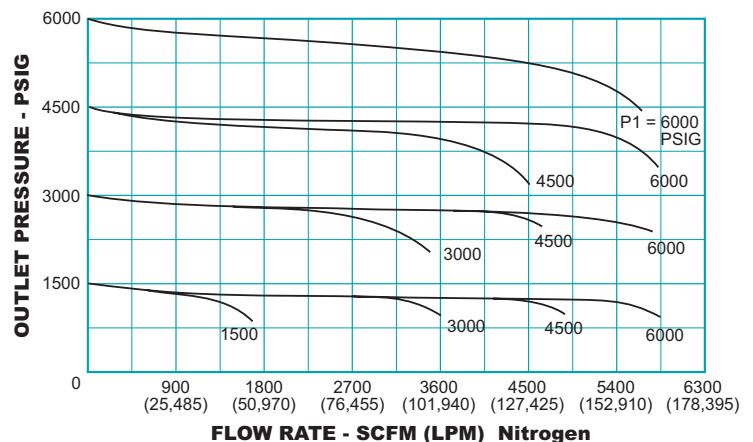

Part Number Selector


example part number:

26-12 **2** **1** - **3** **16** **1**

BASIC SERIES	BODY MATERIAL	LOADING METHOD	INLET & OUTLET PORT TYPE	PORT SIZE	ORIFICE SIZE
26-12	2 - 303 Stainless Steel 3 - 2024-T351 Aluminum 6 - 316 Stainless Steel	1 - External	1 - SAE 2 - NPT 3 - MS33649	12 - 3/4" 16 - 1"	1 - 1/2" Orifice

Repair Kits, Accessories & Modifications may be available for this product. Please contact Tescom for more information.

26-1200 Series $C_v = 6.0$

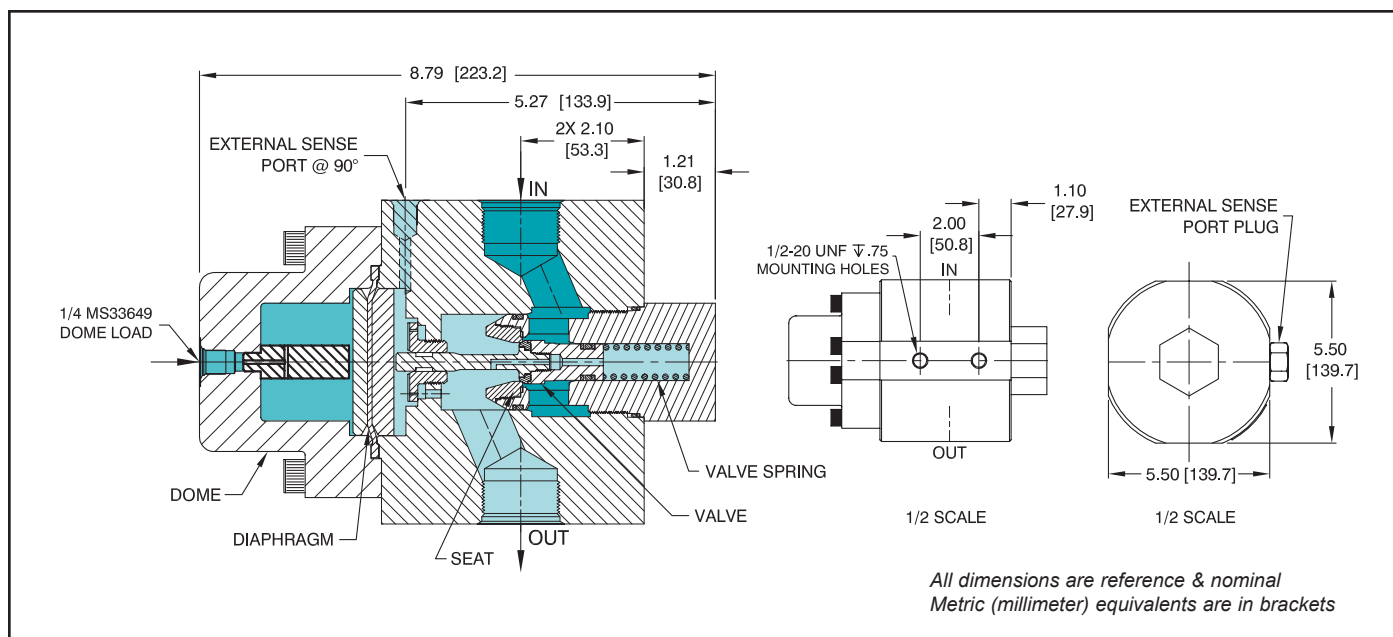

Specifications: $C_v = 6.0$

Operating Parameters

maximum rated inlet pressure: 6000 PSIG

operating temperature:*

Buna-N . . -40° F to +165° F (-40° C to +75° C)

Viton® . . -10° F to +165° F (-23° C to +75° C)

flow capacity $C_v = 6.0$

*For extended temperature applications, consult Tescom.

Media Contact Materials

body 316 Series Stainless Steel

seat CTFE or Vespel®

diaphragm Buna-N or Viton®

o-rings Buna-N or Viton®

back-up rings Teflon®

connecting rod 17-4 Stainless Steel

valve Nitronic 60

guide PPS

remaining parts 300 Series Stainless Steel


For other materials and modifications, please consult Tescom.

Weight 40 lbs. (18 kg)

Pressure Conversion 14.5 PSIG = 1 bar 145 PSIG = 1 MPa

Flow Chart

The curves below were generated using analytical methods - error is estimated at $\pm 10\%$.

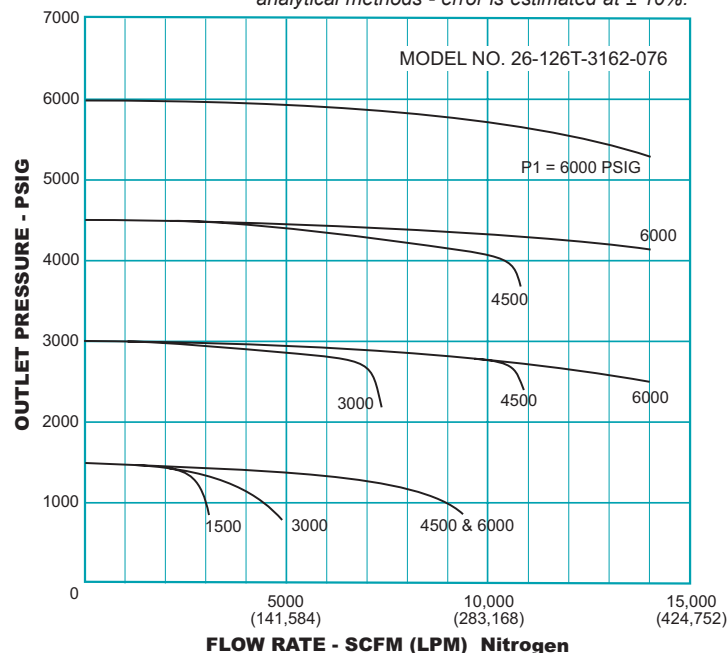

Part Number Selector

example part number:


26-12 6 T - 3 16 2 - 076

BASIC SERIES	BODY MATERIAL	DIAPHRAGM/ O-RING SEAT	TEMPERATURE	INLET & OUTLET PORT TYPE	INLET & OUTLET PORT SIZE	INNER VALVE SIZE	MOD. NUMBER
26-12	6 - 316 Stainless Steel	D - Buna-A CTFE T - Viton® CTFE V - Viton® Vespel® SP21	-40°F to +165°F (-40°C to +75°C) -10°F to +165°F (-23°C to +75°C) -10°F to +300°F (-23°C to +148°C)	1 - SAE 2 - NPT 3 - MS33649	12 - 3/4" * 16 - 1" 20 - 1-1/4" SAE or MS only	2 - 5/8" Orifice	076

*3/4" ports reduce overall C_v to 5.0

Repair Kits, Accessories & Modifications may be available for this product. Please contact Tescom for more information.

26-1200 Series $C_v = 12.0$

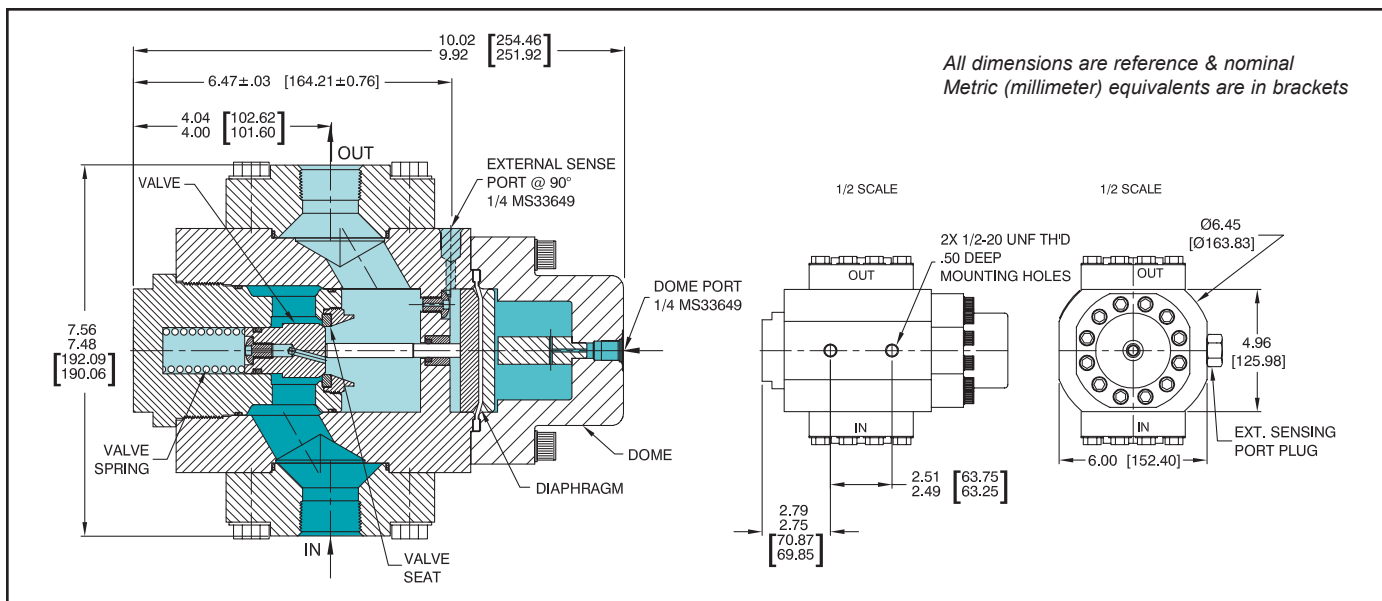

Specifications: $C_v = 12.0$

Operating Parameters

maximum rated inlet pressure: 6000 PSIG
operating temperature* -20° F to +165° F
(-28° C to +75° C)

flow capacity $C_v = 12.0$

*For extended temperature applications, consult Tescom.

Media Contact Materials

body 316 Stainless Steel
seat VespeI®
diaphragm Viton®
o-rings Viton®
back-up rings Teflon®
valve Nitronic 60
remaining parts 300 Series Stainless Steel


For other materials and modifications, please consult Tescom.

Weight 60 lbs. (27 kg)

Pressure Conversion 14.5 PSIG = 1 bar 145 PSIG = 1 MPa

Flow Chart

The curves below were generated using analytical methods - error is estimated at $\pm 10\%$.

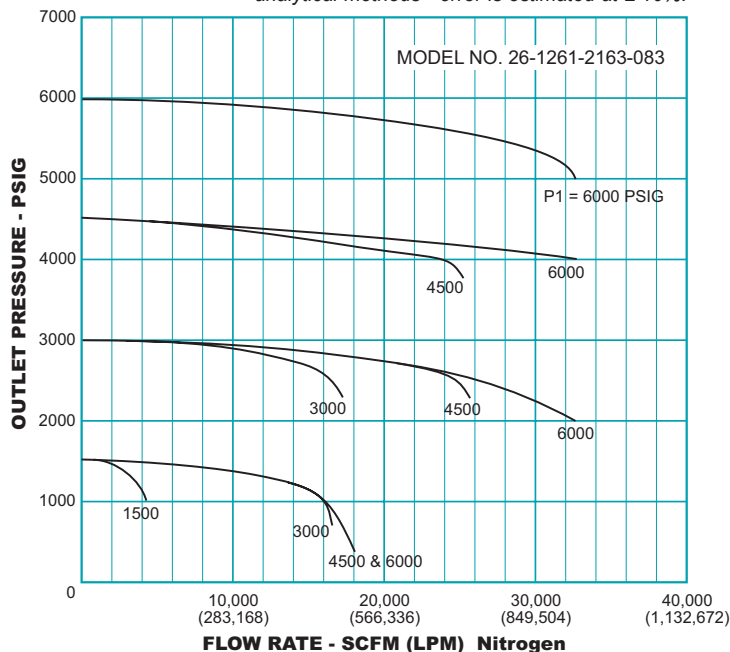

Part Number Selector

example part number:

26-12 6 1 - 2 16 3 - 083

BASIC SERIES	BODY MATERIAL	LOADING METHOD	INLET & OUTLET PORT TYPE	INLET & OUTLET PORT SIZE	INNER VALVE SIZE	MOD. NUMBER
26-12	6 - 316 Stainless Steel	1 - External	1 - SAE 2 - NPT 3 - MS33649	16 - 1" 20 - 1-1/4"	3 - 1" Orifice	083

Repair Kits, Accessories & Modifications may be available for this product. Please contact Tescom for more information.

WARNING! Do not attempt to select, install, use or maintain this product until you have read and fully understood the Tescom Safety, Installation & Operation Precautions.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such product at any time without notice.

©Tescom Corporation, 2006; All Rights Reserved. Tescom is a business unit of the Regulator Division. Trademarks are property of divisions of Emerson Process Management.

For information contact:

TESCOM

TESCOM Industrial Controls

Tel: 800-447-1250 • 763-241-3238

Fax: 763-241-3224 • email: ic@tescom.com

12616 Industrial Boulevard • Elk River, MN 55330 USA

www.TESCOM.com



EMERSON
Process Management